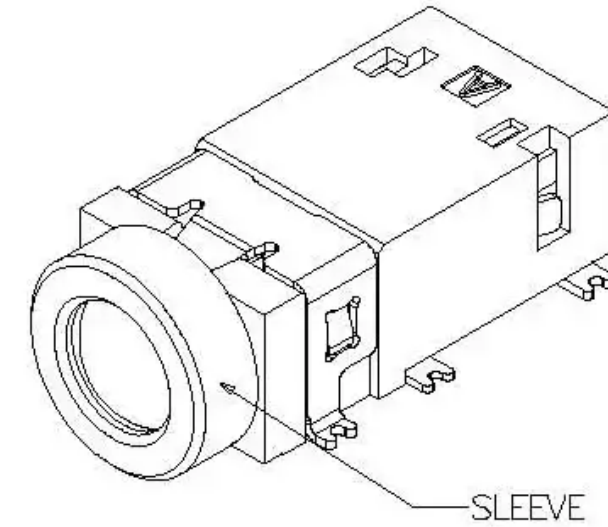
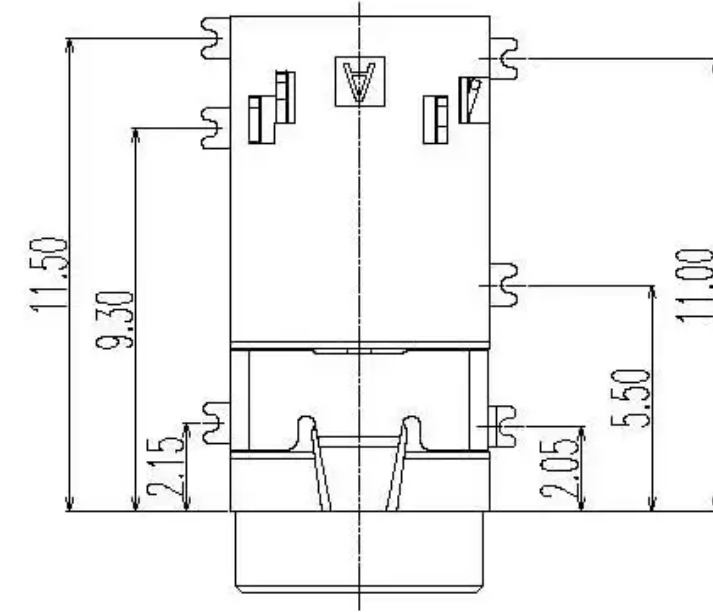
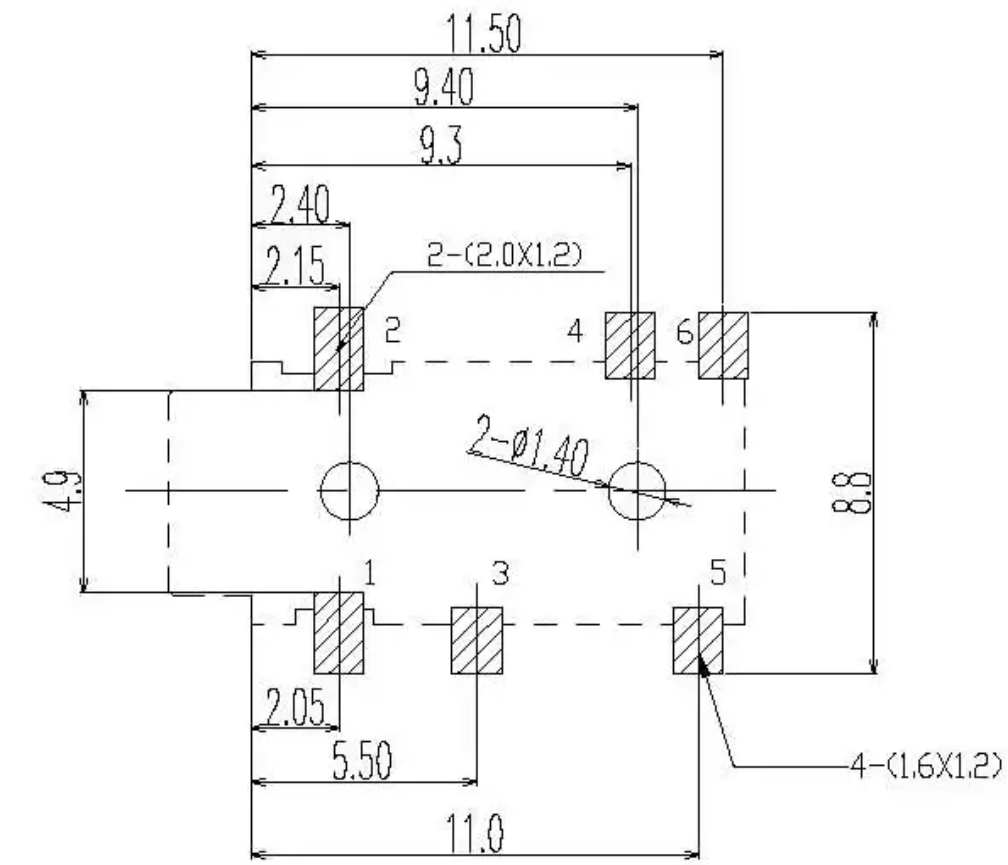

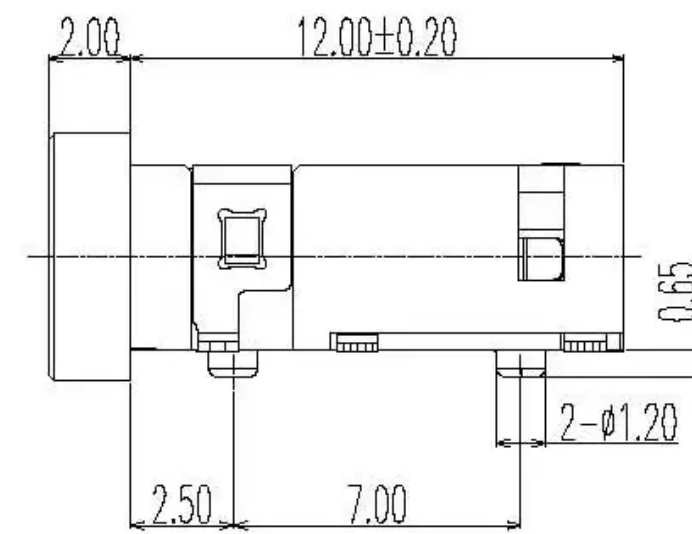
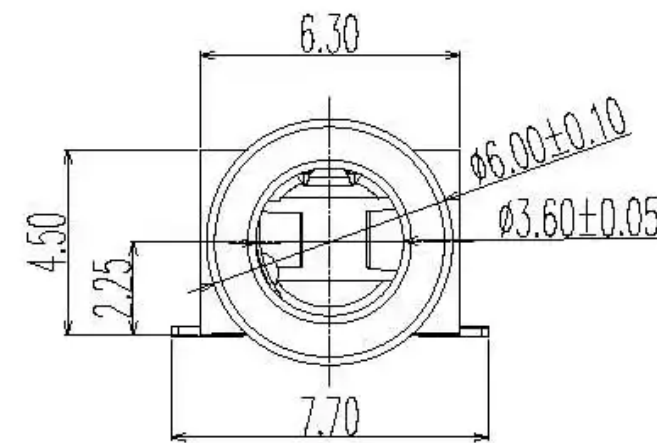



**PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL**

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11/20/17"

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

3D VIEW

P.C.B LAYOUT
TOP VIEW

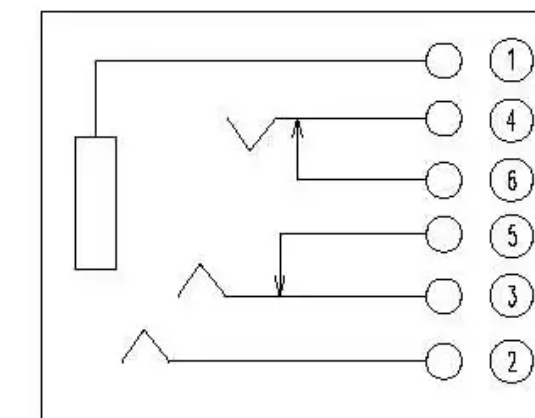

SCHEMATIC

8	SLEEVE	1	BRASS;NICKEL UNDER PLATING OVERALL,GOLD PLATING ON CONTACT AREA	
7	TERMINAL 6#	1		
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
5	TERMINAL 4#	1		
4	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
3	TERMINAL 2#	1		
2	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
1	HOUSING	1	PPA COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

MEASURE POINT:	
QUADRANT POINT	QP
TANGENCY POINT	TP
INTERSECTION POINT	IP
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	
X.	±0.25
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
ANGULAR	±3°

DESIGN: Lucky		DATE 2018/05/12	TITLE: Ø3.5mm PHONE JACK H=4.5 mm SMT LENGTHEN TYPE CONNECTOR		
CHECKED		DATE			
APPROVED		DATE			
PART NO. PJ35A051-F06G1BR-N			REV.: A	SCALE: 1:1	UNIT: mm
DRAWING NO.			SIZE: A4	SHEET: 1/1	