
**TO-263-2L Plastic-Encapsulate Diode****SBDB4045TCTB SCHOTTKY BARRIER RECTIFIER****MAIN CHARACTERISTICS**


I_O	40 (2×20) A
V_{RRM}	45 V
T_j	150 °C
$V_{F(typ)}$	0.40V (@Ta=125°C)

FEATURES

- Low Power Loss,High Efficiency
- Guard Ring Die Construction for Transient Protection
- High Current Capability and Low Forward Voltage Drop

MARKING

SBDB4045TCTB = Device code
Solid dot = Green molding compound device
if none, the normal device
XXXX = Code

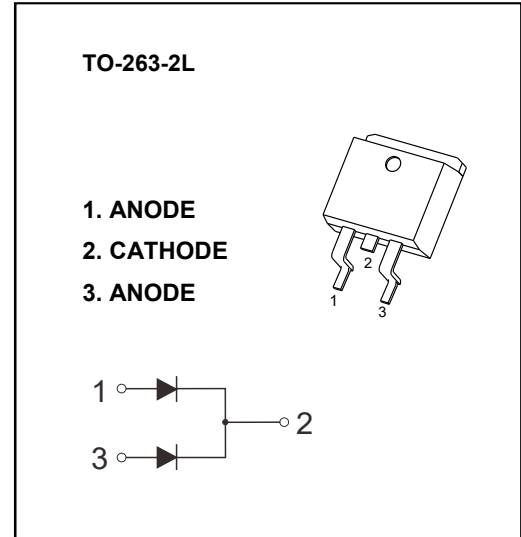**MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)**

Symbol	Parameter	Value	Unit
V_{RRM}	Peak repetitive reverse voltage	45	V
V_{RWM}	Working peak reverse voltage		
V_R	DC blocking voltage		
$V_{R(RMS)}$	RMS reverse voltage	31.5	V
I_O	Average rectified output current	40	A
I_{FSM}	Non-Repetitive peak forward surge current (8.3ms half sine wave)	250	A
$R_{\theta JC}$	Thermal resistance from junction to case , $T_c=25^{\circ}\text{C}$	2.0	$^{\circ}\text{C/W}$
$R_{\theta JA}$	Thermal resistance from junction to ambient	62.5	$^{\circ}\text{C/W}$
T_j	Junction temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage temperature	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=1\text{mA}$		45			V
Reverse current	I_R	$V_R=45\text{V}$	$T_j=25^{\circ}\text{C}$		50	200	μA
			$T_j=125^{\circ}\text{C}$		50		mA
Forward voltage	V_F	$I_F=10\text{A}$	$T_j=25^{\circ}\text{C}$		0.42		V
			$T_j=125^{\circ}\text{C}$		0.31		V
		$I_F=20\text{A}$	$T_j=25^{\circ}\text{C}$		0.47	0.55	V
			$T_j=125^{\circ}\text{C}$		0.40		V

*Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycles $\leq 2.0\%$.

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

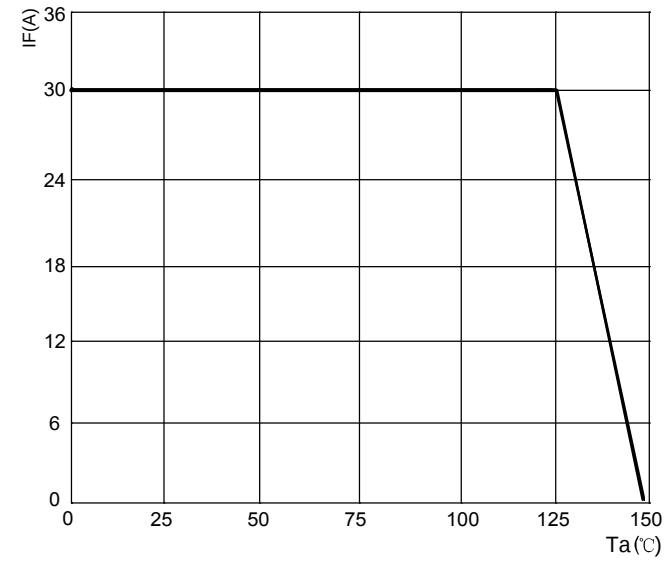


FIG.2: TYPICAL FORWARD CHARACTERISTICS

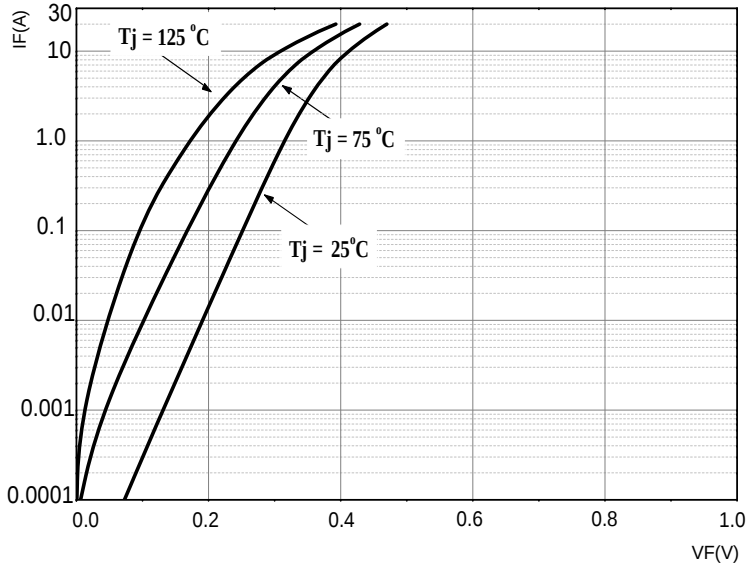


FIG.3: TOTAL CAPACITANCE DERATING CURVE



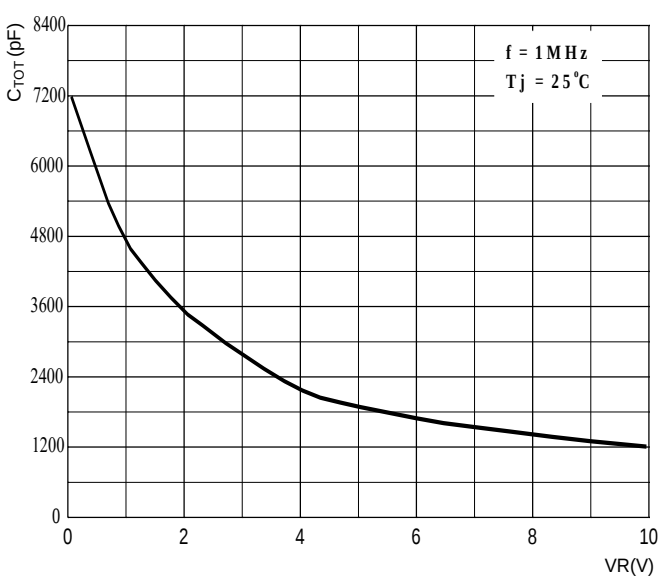


FIG.4: TYPICAL REVERSE CHARACTERISTICS

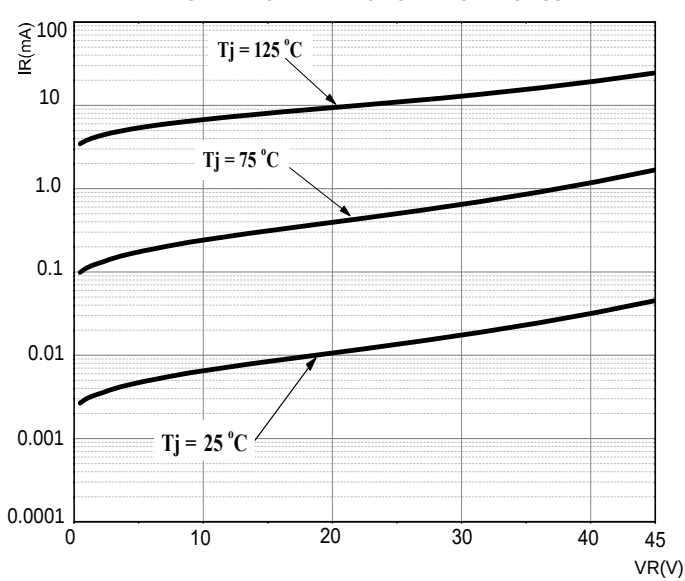


TO-263-2L Package Outline Dimensions

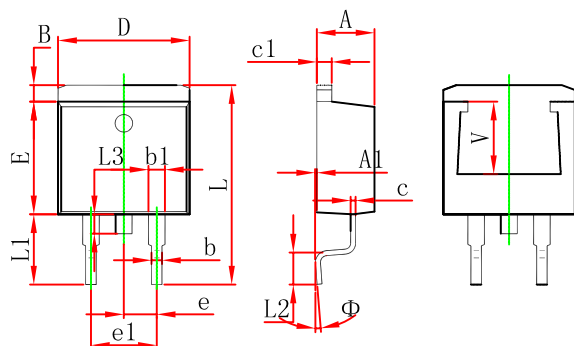

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.120	1.420	0.044	0.056
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
L	14.940	15.500	0.588	0.610
L1	4.950	5.450	0.195	0.215
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
Φ	0°	8°	0°	8°
V	5.600 REF.		0.220 REF.	

TO-263-2L Suggested Pad Layout



Note:

1. Controlling dimension: in millimeters.

2. General tolerance: $\pm 0.05\text{mm}$.

3. The pad layout is for reference purposes only.